




MX-240S/500S

5-zone 19" selective mixing amplifier

This compact integrated amplifier generates 240W / 500W. You can instantly create five zones that operate independently, each with its own volume level and selective PA option.

- 240/500W output capacity (RMS)
- 5-zone volume control
- selective PA option
- inputs
 - 4 MIC (XLR/Jack)
 - 1 selective MIC (MIC-318)
 - 2 line inputs (RCA)
 - Pre out/Amp in
- separate volume control in each zone
- separate bass and treble tone control
- switch for phantom power on inputs 1-4
- chime function and 2 siren tones with external terminal
- protection from short-circuiting
- thermal protection
- 3 RS

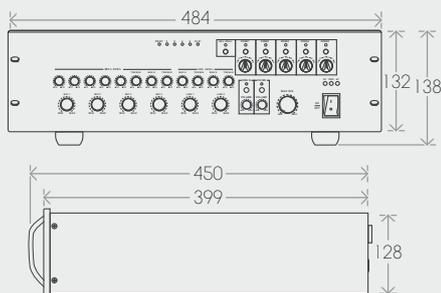

SPECIFICATIONS	MX-240S	MX-500S
output power 100V	240W	500W
output power RMS 8Ω	240W	500W
frequency range	50Hz - 16kHz	
zones	5	
direct output	70V / 100V / 4Ω	
LED level indicator	yes	
tone control	yes (individual)	
built-in source	yes	
REC output	yes	
pre amp output	yes	
MIC input	4(1)	
AUX input	(4)1	
tape input	0	
chime	yes	
phantom power supply	yes (individual)	
priority levels	5 : evacuation / tel / MIC-318 / MIC / sirene, chime	
power supply	240V AC / 24V DC	
power consumption	320W	800W
dimensions (h x w x d)	132 x 484 x 399mm	
weight	20,15kg	22kg

OPTIONAL ACCESSORIES

microphones MIC-318 (selectif) / MIC-511C (phantom power supply) / MIC-621A (power adapter)